

Design and Analysis of Electromagnetic Wave Absorbing Structure using Layered Composite Plates

Jung-Hoon Oh¹, Kyung-Sub Oh², Chun-Gon Kim³, Chang-Sun Hong⁴ and Dong-Min Lee⁵

^{1,3,4} *Department of Aerospace Engineering, Korea Advanced Institute of Science and Technology, 373-1, Kusong-dong, Yusong-gu, Taejon 305-701, KOREA:silvery@kaist.ac.kr*¹

² *Department of Electrical Engineering Korea Advanced Institute of Science and Technology 373-1, Kusong-dong, Yusong-gu, Taejon 305-701, KOREA:weber@kaist.ac.kr*

⁵ *Agency for Defence Development, P.O. Box 35-3, Yusong-ku, Taejon 305-600, KOREA*

SUMMARY: The absorption and the interference shielding of the electromagnetic waves emitted by the radar or other electronic equipments are important problems for both commercial and military purposes. In this study, the minimization of the electromagnetic wave reflections using composite layers with different dielectric properties was performed. Dielectric constants were measured for glass/epoxy composites containing conductive carbon blacks and carbon/epoxy fabric composites. Using the measured permittivities of the composites having various carbon black contents, the optimal electromagnetic wave absorbing structure in X-band(8.2GHz-12.4GHz) was determined. The optimal multi-layered composite plates have the thickness of 2.6mm. The maximum reflection loss is -30 dB at 10 GHz, and the bandwidth having the absorptivity lower than -10dB is about 2GHz .

KEYWORDS: Electromagnetic wave, Carbon black, Composites, Permittivity, Reflection loss, X-band, Dielectrics

INTRODUCTION

The absorption and the interference shielding of the electromagnetic wave problem become a very important issue for both commercial and military purposes. The interference shielding study is a matter of interest in the MHz frequency ranges generally used by commercial fields. The studies of higher frequency range are confidentially performed for military purposes. But in recent year electromagnetic wave studies in the high frequency range are becoming more important because the commercially used frequencies are shifting to the higher frequencies.

Generally electromagnetic waves are absorbed by lossy coating materials which are composed of dielectric or magnetic lossy material mixed with flexible mediums such as rubber or epoxy etc. Coating materials can easily adhere to metal surfaces but need frequent repairs due to the poor structural strength. Recently the amount of composite materials used for aircrafts, ships and automobiles is rapidly increasing. Following this trend, adding lossy materials to composites in itself, we developed the electromagnetic wave absorbing structure having sufficient structural strength without an additional coating procedure.

Electromagnetic wave is composed of electric and magnetic fields. The electrical and the magnetic property of materials are represented by permittivity and permeability, respectively.

The electromagnetic wave absorption is made possible by mixing various additives which can change the permittivity or the permeability of the composites. Of these two methods, the permeability control method uses magnetic additives such as ferrite. But general magnetic additives have the defect of weights and other bad characteristics. The resonance frequency producing magnetic losses exists in the MHz range and beyond this range, the loss efficiency rapidly decreases. So in X-band range, ferrite materials can not be used without special processing. The permittivity of a composite can be controlled by way of mixing carbon black or silver particles etc. which enhance the conductivity within the medium. There is a certain limit in the additive content which gives absorbing ability of electromagnetic waves. Beyond this limit, most of waves are reflected at the surface before absorption.

In this study, the minimization of the electromagnetic wave reflections in X-band with center frequency of 10 GHz was performed. Glass/epoxy fabric having good transmission property is used as the front layer with the lossy material, carbon black. And the excellent reflector, carbon/epoxy fabric is used as the back layer. This layered structure functions as the absorption and the interference shielding of electromagnetic waves simultaneously. We designed the optimal electromagnetic wave absorbing structure using the multi-layers with various carbon black contents.

MANUFACTURE OF COMPOSITE PREPREG

Vulcan XC-72 conductive carbon black was supplied by Cabot Carbon Ltd, USA. The specific gravity is 1.8 and the particle diameter is 27nm. The composite Prepregs, carbon fabric/epoxy prepreg CF-3327EPC and glass fabric /epoxy prepreg K618 were supplied by HANKUK FIBER Co., Ltd.

Denotation	CB0	CB5	CB6	CB7	CB8	CB10	CB15	CB20
Contents of carbon black	0%	5%	6%	7%	8%	10%	15%	20%

Table 1. Specimen denotations of glass fabric/epoxy composite

The carbon black contents by weight percentage of the specimen are denoted for each type of specimen as shown in Table 1. The specimens of the glass fabric are impregnated by epoxy with carbon black. At first, the mixing of epoxy and carbon black was accomplished and uniformly applied to glass fabrics. For the specimens of carbon black content over CB15, the viscosity increased rapidly and it was hard for the specimen to keep the uniformity in carbon content.

S-parameters in the frequency range of 8.2-12.4 GHz were measured using network analyzer and X-band wave-guide as sample holder. Sample size is 10.1mm x 22.9mm and thickness is different for each case. Permittivity was calculated based on the measured s-parameters.

PERMITTIVITY

The permittivity, ϵ , and the permeability, μ , representing electromagnetic characteristic are complex values and defined by the follow equations:

$$\epsilon_r = \epsilon_r' - j\epsilon_r'' \quad \mu_r = \mu_r' - j\mu_r'' \quad (1)$$

The subscript r means the relative value to the permittivity or permeability of air. The permeability of the specimens is expressed as 1(real term)-j0(imaginary term) because glass/epoxy and carbon black are inert in the magnetic property. Therefore the specimens have only dielectric property and the permittivity values are shown in Fig. 1 and Fig. 2.

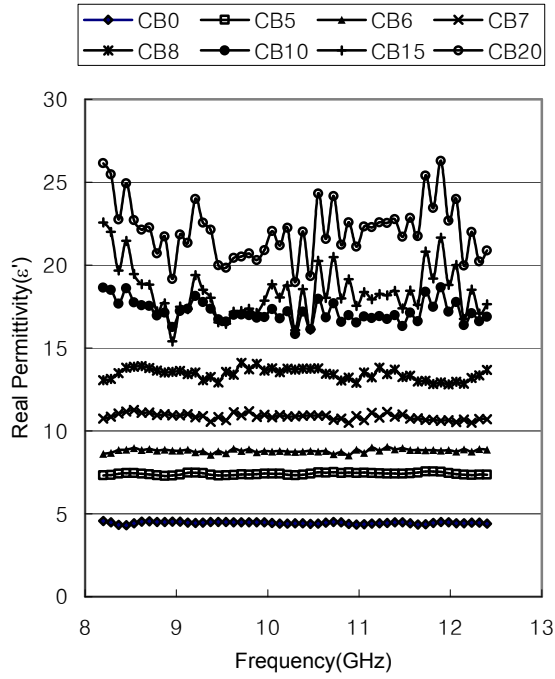


Fig.1 Real part of permittivity vs carbon black content

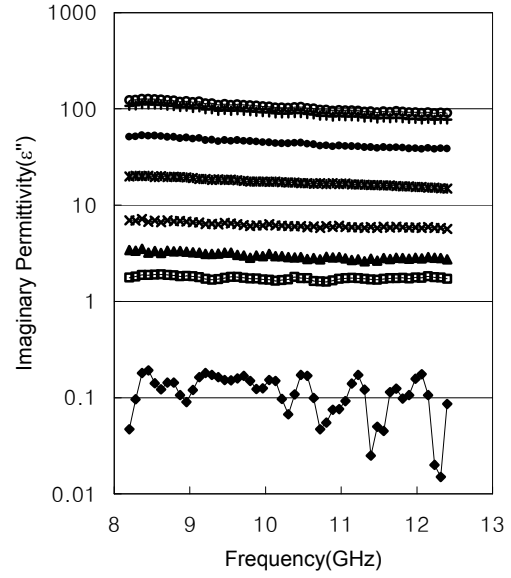


Fig. 2 Imaginary part of permittivity vs carbon black content

Real part of permittivity for the specimen above CB10 shows variation along the frequency range. This is thought to be caused by uneven distribution due to excessive carbon black content in mixing process and wave leaks between specimen and wave-guide. The more additives are added, the smaller the amount of transmitted waves (S_{12}) used in calculation of permittivity is. If S_{12} approaches leaks, we can not distinguish between the real value and the experimental errors. When measuring the electromagnetic characteristics of lossy material, we must pay attention to the sealing between the specimen and wave-guide. In this measurement we used silver coating at the sides of specimens and minimized the gap between the specimen and wave-guide. For the specimen with carbon content above CB10, the measured value of the imaginary permittivity rapidly increased over 40. As increasing carbon black contents, dielectric properties show conductive characteristic. This critical threshold value exists nearby CB10. If the imaginary part of permittivity has high value, almost electromagnetic waves are reflected at a surface like metal. Then it is possible to shield electromagnetic waves but impossible to minimize reflection of incident waves. Thus, CB5, CB6, CB7 and CB8 having proper loss values could be the candidates of absorbing material that is used for front layers of the electromagnetic absorbing structure. And the permittivity of carbon/epoxy fabric hard to be measured because S_{12} value is near 0. Their electric resistance is $10^{-4}\Omega\text{m}$ and reflection coefficient calculated from the electric resistance is 0.9895. These values are almost same as those of metal.

ELETROMAGNETIC WAVE ABSORBING STRUCRURE

For the minimization of reflection waves, required is the impedance-matching condition. When the single-layered matching-type absorbing structure with a metal back-surface receives a plain wave, the incident impedance Z_{in} normalized by that of free air, Z_0 , is

$$Z_{in} = Z_0 \sqrt{\frac{\mu_r}{\epsilon_r}} \tanh \left[j2\pi df \sqrt{\mu_r \epsilon_r} \right] \quad (2)$$

In this case, $Z_0=Z_{in}$ satisfies the zero-reflection condition. Eq.(2) has six variables such as $\mu_r', \mu_r'', \epsilon_r', \epsilon_r'', f, d$. The meaning of Eq.(2) is that if electromagnetic waves with frequency f enter to an absorbing material with electromagnetic properties of $\mu_r', \mu_r'', \epsilon_r', \epsilon_r''$, the material has a matching thickness d . In terms of design, minimization of matching thickness is the main objective by controlling the permittivity and permeability for a given working frequency. Reflection coefficient and reflection loss are defined by the follow equations

$$R = \frac{Z_{in} - Z_0}{Z_{in} + Z_0} = \frac{\frac{Z_{in}}{Z_0} - 1}{\frac{Z_{in}}{Z_0} + 1} \quad \text{Reflection loss (dB)} = 20 \log |R| \quad (3)$$

The finite element code that is able to calculate reflection losses of multi-layered composites plates was developed and the multi-layered absorbing structure with maximum reflection loss was analyzed using the code.

SINGLE-LAYERED ABSORBING STRUCTURE

The single-layered absorbing structure is consisted of a front layer of CB5 or CB6 etc. and a back layer of carbon fabric/epoxy. Because the layer of carbon fabric/epoxy functions only as a reflector like a metal surface, it is termed not to be a double layer but single layer. For the specimens with carbon black contents over CB10, the maximum reflection loss is only -2.5dB owing to high reflection on the surface. And a matching status can be found at CB5, CB6 and CB7. The best simulated case has the matching thickness of 2.7mm in CB6 with a working frequency of 10GHz. The variation of the reflection loss with thickness is shown in Fig.3 for the specimen of CB6.

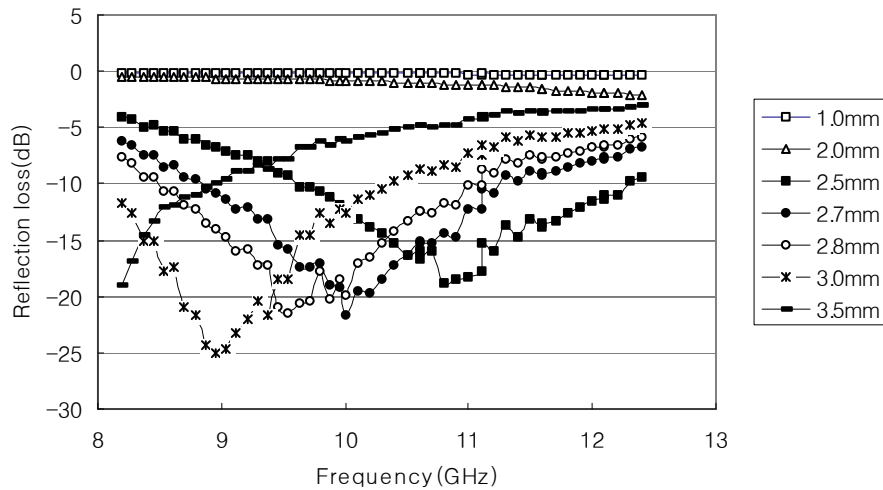


Fig. 3 Simulated reflection loss of glass fabric/epoxy composites with 6% carbon black (CB6)

A matching status is not observed for the thickness below 2.0mm. As the thickness increases, matching frequency shifts to the lower frequency. The specimen with 2.7mm thickness shows maximum loss (about -20dB) at working frequency of 10GHz and -10dB absorption is predicted from 9GHz to 11GHz. This bandwidth remains unchanged with the thickness

variation. Generally speaking, the reflection loss of -20dB corresponds to an excellent performance.

MULTI-LAYERED ABSORBING STRUCTURE

The reflection loss was simulated for the multi-layered plate composed of laminate, CB5, CB6, CB7 and CB8. All cases were simulated with 0.1mm thickness steps. The best double-layered structure is the combination of CB5 1.9mm and CB7 0.7mm. And the best triple-layered structure is the combination of CB5 1.4mm, CB6 0.7mm, CB7 0.5mm. Fig. 4 shows the comparison of absorbing performance among a single-layered structure and multi-layered ones.

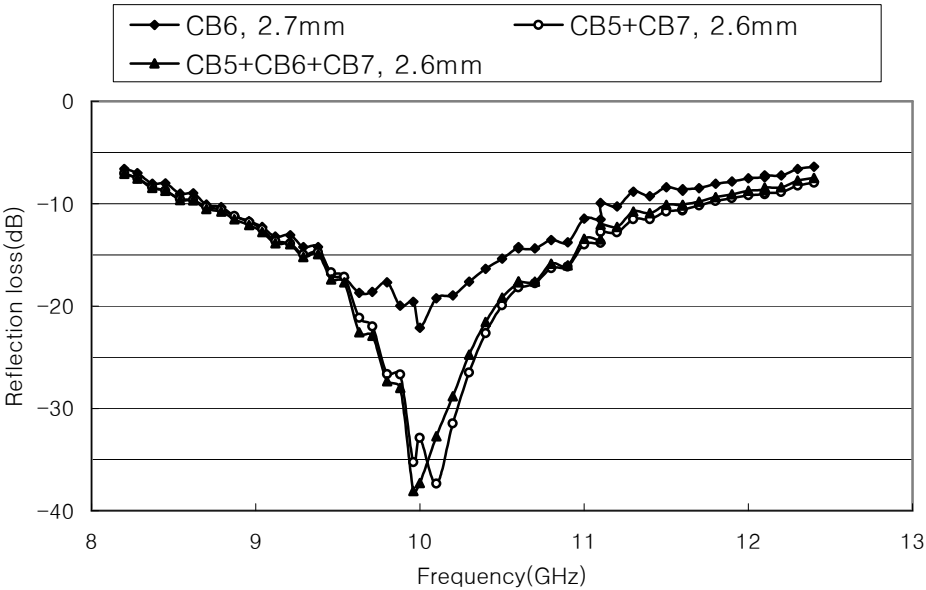


Fig. 4 Reflection loss of single and multi-layered absorbing structures

The multi-layered structure shows improved performance in both thickness and the reflection loss. The matching thickness of the multi-layered structure is smaller than that of single-layered one by 0.1mm. The maximum reflection loss and -20dB bandwidth significantly are improved. But improvement in the performance is not obvious between the double and triple-layered structures. Thus we selected the double-layered structure for the optimal electromagnetic absorbing structure.

EXPERIMENTAL RESULTS

The selected optimal structure was tested and compared with the calculated result. The specimen is composed of CB5 1.9mm, CB7 0.7mm and carbon fabric/epoxy of thickness 1.75mm in series. The result of reflection loss is shown in Fig.5.

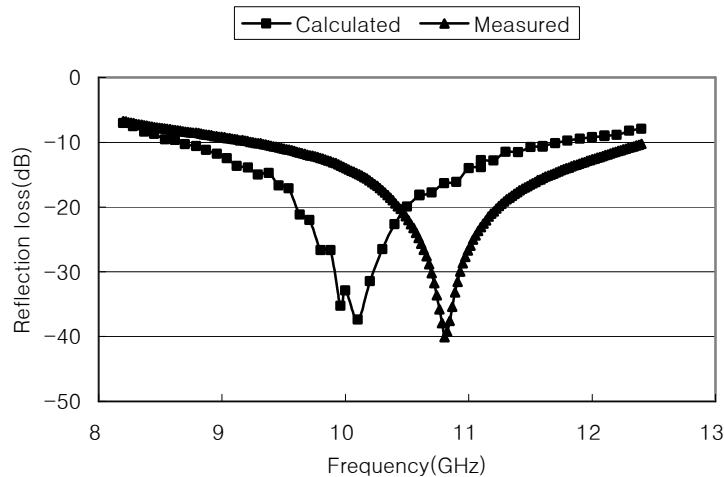


Fig. 5 Measured and calculated reflection loss of the optimal absorbing structure

The two cases have almost the same value in the absorbing bandwidth and maximum loss. But the measured central frequency shifted by 0.8GHz to the higher frequency. There are two possible reasons. One is the experimental problem of wave-guide in which the TM(Transverse Magnetic) mode of plain wave in wave-guide didn't have a perpendicular incident angle to the surface of the specimen. The other is the measurement error in the permittivity which was used in the calculation of the reflection loss.

CONCLUSION

Structures absorbing electromagnetic wave of X-band region have been designed and fabricated using fiber-reinforced composites and dielectric loss material, carbon black. Multi-layered structures showed improved performance in the electromagnetic wave absorption compared to the single layered ones. The selected optimal double layered structure is composed of CB5 1.9mm and CB7 0.7mm. Maximum reflection loss is about -40dB at 10GHz and the bandwidth having the absorptivity -10dB is about 2GHz .

REFERENCES

1. N.C. Das, D. Khastgir, T.K. Chaki and A. Chakraborty, "Electromagnetic interference shielding effectiveness of carbon black and carbon fibre filled EVA and NR based composites", *Composites, Part A* 31, 2000, pp. 1069-1081.
2. D.D.L. Chung, "Electromagnetic interference shielding effectiveness of carbon materials", *Carbon*, 39, 2001, pp.279-285.
3. S.K. Kwon, J.M. Ahn, G.H. Kim and C.W. Chun, "Microwave Absorbing Properties of Carbon Black/Silicon Rubber Blend in the GHz Range", *Proc. of the 3th Conference on National Defense Materials* , 2000, pp.C161-C169.
4. Xiangcheng Luo and D.D.L. Chung, "Electromagnetic interference shielding using continuous carbon-fiber carbon-matrix and polymer-matrix composites", *Composites, Part B* 30, 1999, pp. 227-231.

5. H.B. Shim, M.K. Seo and S.J. Park, "Electromagnetic interference shielding of Carbon Fibers-Reinforced Composites", *Polymer(Korea)*, Vol.24, No.6, 2000, pp. 860-868.